


GAYLORDS'S "SIMPLE 2 WIRE HOOK-UP" WIRELESS REMOTE INSTALLATION GUIDE

THE DOME LIGHT IS INSTALLED IN THE LID AND WILL AUTOMATICALLY TURN ON WHEN YOU REMOTELY UNLOCK THE LID. IT WILL TURN OFF AFTER 2 MINUTES.

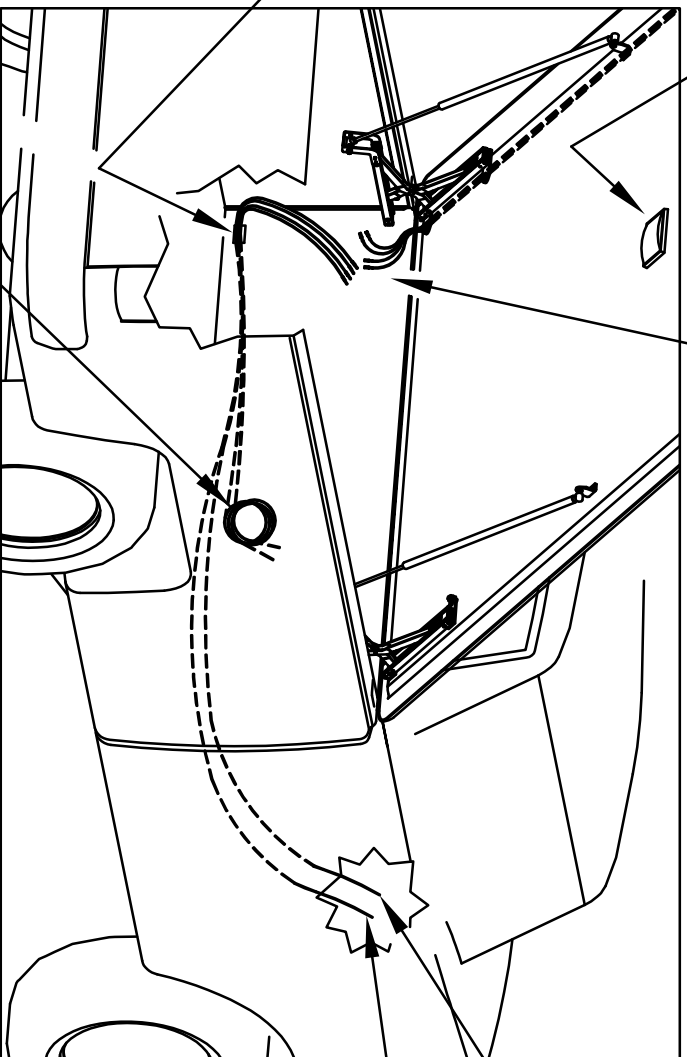

① CONNECT THE TRUCK'S HARNESS TO THE TO THE LID'S HARNESS.

FOR BEST RESULTS FEED THE WIRING THROUGH EXISTING FEED THRU HOLES IN THE TRUCK BED.

② CONNECT THE RED WIRE TO +12 VOLT SOURCE THAT IS ALWAYS ON.

③ CONNECT THE BLACK WIRE TO GOOD, CLEAN CHASSIS GROUND

④ PRESS AND HOLD THE BOTTOM LEFT BUTTON FOR TWO (2) SECONDS TO UNLOCK THE TONNEAU COVER.

THE 2 SECOND DELAY IS A SAFETY FEATURE THAT WILL KEEP THE LID FROM OPENING ACCIDENTALLY WHILE DRIVING.

OPTIONAL:
THE BUTTONS WILL FUNCTION ONLY AFTER THE DOORS HAVE BEEN PROPERLY CONNECTED TO THE LID ELECTRONICS.

OPTIONAL:

CONNECT THESE WIRES TO THE DOOR ELECTRONICS SO THAT THE LID'S FOB CAN BE USED TO LOCK/UNLOCK YOUR DOORS.

THE OPTION BUTTONS WILL FUNCTION ONLY AFTER THE OPTIONAL WIRES HAVE BEEN PROPERLY CONNECTED. GAYLORD'S INTENT IS TO PROVIDE OUR CUSTOMERS WITH A WIRELESS KEYLESS ENTRY SYSTEM FOR THE LID ONLY.

THE ADDITIONAL OPTION WIRES ARE ONLY PROVIDED AS A CONVENIENCE FOR OUR CUSTOMERS AND SHOULD BE CONNECTED BY A QUALIFIED ELECTRONICS TECHNICIAN.

GAYLORDS WILL NOT BE RESPONSIBLE FOR ANY ELECTRONIC FUNCTION OTHER THAN THE "LID RELEASE ACTION." ADDITIONAL ELECTRONIC COMPONENTS MAY BE REQUIRED TO PROPERLY CONNECT ADDITIONAL OPTIONS TO YOUR TRUCK.

